
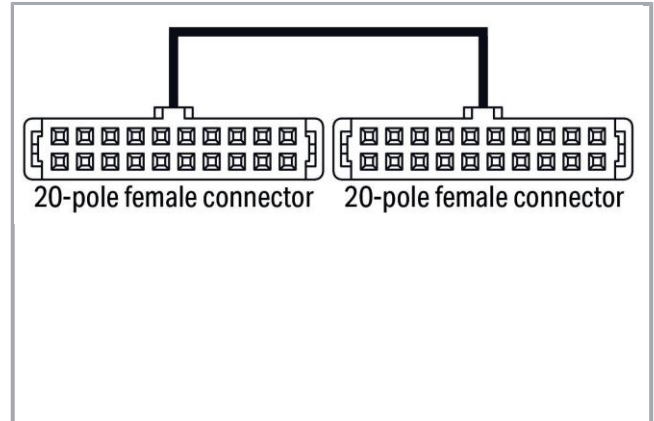


Data sheet | Item number: w706-3057/300-100

System cable; for Schneider TSX; 16 digital inputs or outputs; Length: 1 m (1 MOhm); Conductor cross-section: 0.14 mm²

<https://www.domat-int.com/en/data-sheets>

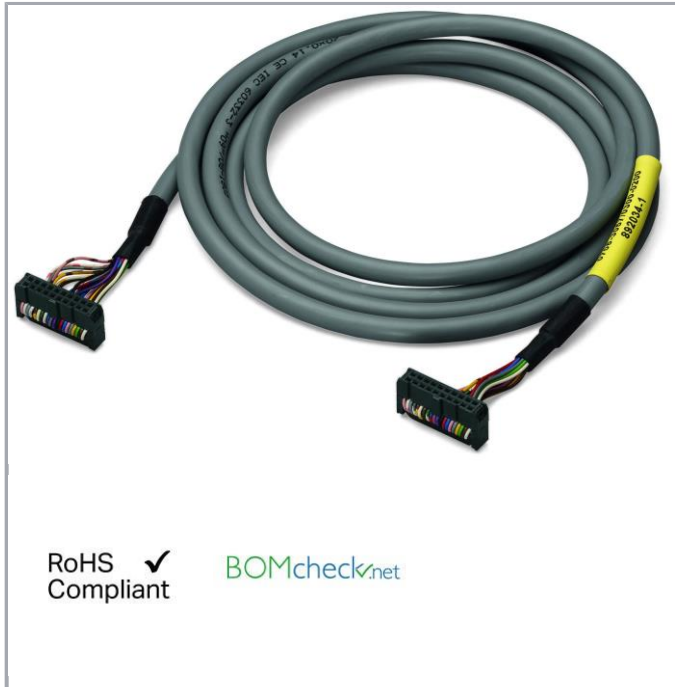

Item description

WAGO's Interface Cables provide fast and easy connection of WAGO I/O Modules equipped with 20-pole pluggable connector (750-1400, -1402, -1500, -1501, -1502) to appropriate interface or relay modules (16-channel) featuring a 20-pole pluggable connector. The cables are available in 1-, 2- and 3-meter lengths; each has one 20-pole pluggable connector at both ends.

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Technical data

In-/Outputs	16-digital in- or outputs
Operating voltage	≤ DC 35 V
Max. current per conductor	1 A

Safety and protection:

Protection class	IP20
------------------	------

Connection data

Connection type (1)	System
No. of poles	20
Pluggable connector	Pluggable connector per DIN 41651; female connector
Connection type (2)	System
No. of poles 2	20
Pluggable connector 2	Pluggable connector per DIN 41651; female connector
Type of cable	LiYY
Cross section of single conductor	0.14 mm ²
Color coding	Per DIN VDE 47100

Geometrical Data

Cable length	1 m
--------------	-----

Material Data

Weight	93 g
--------	------

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 70 °C
---	---------------

Commercial data

Product Group	30 ()
Packaging type	BOX
Country of origin	FR
GTIN	4045454873752
Customs Tariff No.	85444290900

Subject to changes.

Domat control system

WAGO Kontakttechnik GmbH & Co. KG (manufacturer)

Do you have any questions about our products?

We are always happy to take your call at +420 461 100 666.