


order number

w750-8101 DDC controller

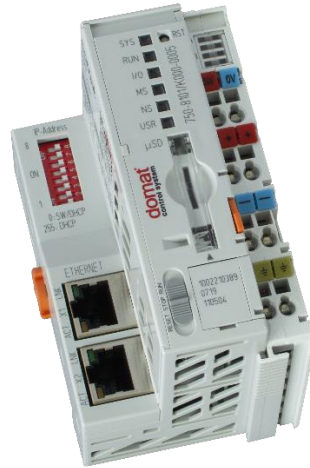

Summary

DDC (Direct digital control) controller w750-8101 is a freely programmable PLC with Merbon RT. It provides two ethernet ports. Besides network and fieldbus interfaces, the controller supports all analog, digital and special I/O module within the 750/753 series.

Application

- Free programmable control units for HVAC systems and other applications with web access.
- Data acquisition, processing, and presentation systems with advanced networking features.
- Protocol converters with web data presentation (must be programmed by user).

Function

The w750-8101 has a twin-port Ethernet interface and thanks to its integrated switch it is able to connect more PLCs in a line topology.

The PLC shall be completed by I/O module cards, which are supplied separately. Recommended datapoint load is about 300 I/Os per PLC. The I/O modules communicate with the main unit over an internal bus, K-bus.

Typical use of the PLC is in building control systems, industry and energy management systems.

- Programmable via Merbon IDE
- Direct connection of I/O modules
- 2x Ethernet (configurable)
- Operating system Linux
- Maintenance free

The application is created and uploaded in the Merbon IDE development environment. The maximum application program size depends on number of physical and software data points, amount of function blocks which require more memory (e.g. time schedulers), degree of code optimisation, and number of

connections the PLC has to handle.

The process station contains a web server for remote connection and user intervention. The web pages are created in Merbon HMI editor, which is included in the package of development programs. The exported web definition is uploaded to the process station through Merbon IDE.

State of inputs and outputs of each module, status of system, runtime and power supply is indicated by LEDs.

Controller is to be mounted on standard DIN rail.


Controller is made from processor module [PFC100 \(750-8101\)](#).

See *domat – Technical application notes* for connection examples.

Technical data

Power	24 V DC (-25...+30 %), 1.8 W, cage clamp type terminals
Operating temperature	0 ÷ 55 °C
Max. admissible humidity	95 %
PLC:	
CPU	Cortex A8, 600 MHz
Memory	256 MB RAM, 64 kB NVRAM
Memory card	microSD up to 32 GB (push/push type slot, cover possible to seal)
Addressing	SW or by DIP switches
Communication:	
Ethernet	2× Ethernet 10/100, RJ45 2× signalling LEDs (Link, Data) in the Ethernet connector
Programming environment	Merbon IDE ver. 2:4:0:x or later (ST, FBD)
Terminals	cage clamp terminals - wire 0.08...2.5 mm ²
Dimensions	71.9 (h) × 61.5 (w) × 100 (d) mm
Weight	approx. 380 g
Protection degree	IP20
Material	polycarbonate, polyamide 6.6
Standards conformity	electromagnetic compatibility (EMC) EN 61000-6-2, 61000-6-3 environmental testing EN 60068-2-42, 60068-2-43


Dimensions and connection

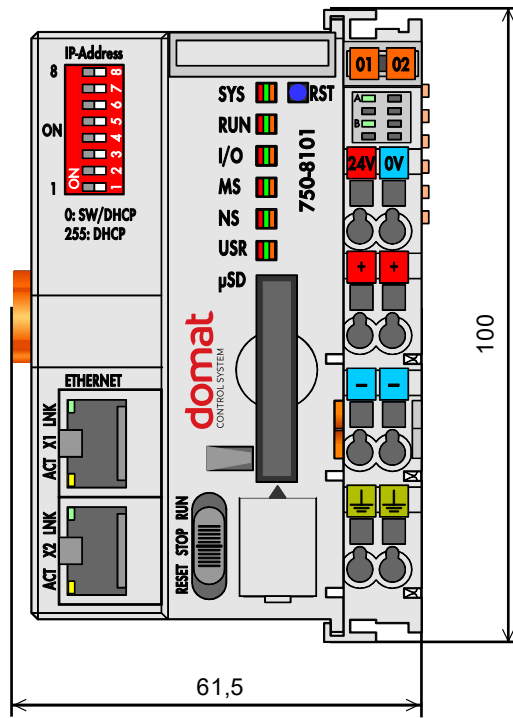


Dimensions are in *mm*.

For proper function of the controller assembly a **terminating module** 750-600 must be snapped at the end of assembly. All modules must be aligned.


To ensure power supply for the connected I/O modules, it is required to connect the **24V** and **+**, **0V** and **-** terminals on the power module (see image below).

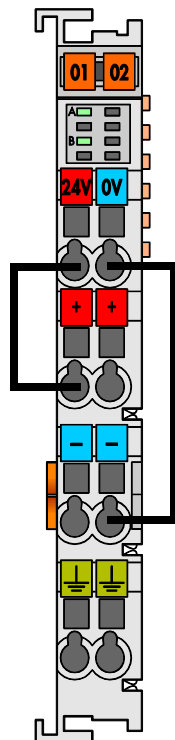

During the installation, ensure sufficient distance of controller assembly from the surrounding components:

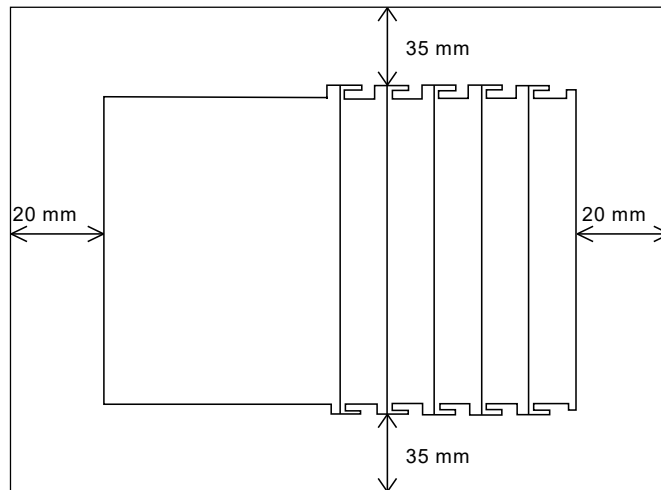

LED indication

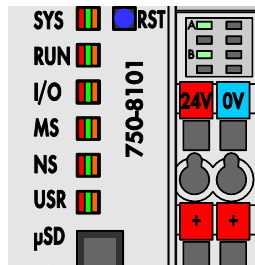

Red/ green/ orange LED (blink):
 SYS – system status
 RUN – runtime is running
 I/O – bus status (not used)
 MS – module status (not used)
 NS – not used
 USR – user programmable
 green LED:
 uSD – SD card status (blinks during writing on card)
 A – state of supply voltage (still)
 B – state of I/O modules supply voltage (still)

Switches

RST

Reset button - unused


RESET STOP RUN



Switch in RUN position starts the runtime. Turning the switch in STOP position stops the runtime. In this position it is not possible to deploy and run solution. Holding switch in the RESET position for 2-7 seconds causes warm restart. Holding RESET for longer than 7 seconds invokes cold restart.

Address

By DIP switches the IP address can be set:
 0 – default address / SW address
 1...254 – fixed address (192.168.1.1...254)
 255 – DHCP



Others

Internal K-bus addressing

For each module a position corresponding to the physical position in assembly is given to the module. The first module next to the controller gets adress 1, etc.

Slot for SD card is for production purposes only, not intended to be used by user.

Programming

The main programming tool is the Merbon package which contains I/O editor, graphical editor of the function plan (FBD), structure text editor and compiler (Merbon IDE). The Merbon package also contains LCD menu editor as well as web editor (Merbon HMI).

The application program consists of function blocks which are stored in libraries. Those contain analogue and digital functions, mathematical blocks including goniometric functions, time schedulers, alarm blocks, and HVAC specific blocks (heat recovery, dewpoint calculation, enthalpy, pump switch etc.). The program can be set up also as structure text (ST) or with combination of both types of programming languages.


In case of implementation of your own ST driver, there is limitation of max. 10 clients connected simultaneously.

Number of connections from SSCP clients is max. 20. This includes connections from Merbon IDE, Merbon SCADA, HT104/200, mobile application Merbon Visual, connection from other PLCs over SSCP etc.

Uploading a project from the Merbon IDE reserves two SSCP TCP connections.

Accessories**Mini-WSB marking card (247-513)**

- snap-on type
- horizontal markings of each module

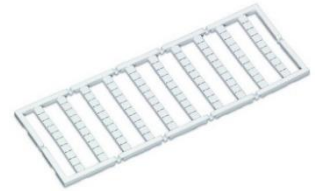**Safety note**

The device is designed for monitoring and control of heating, ventilation, and air conditioning systems. It must not be used for protection of persons against health risks or death, as a safety element, or in applications where its failure could lead to physical or property damage or environmental damage. All risks related to device operation must be considered together with design, installation, and operation of the entire control system which the device is part of.

**Changes in
versions**

01/2020 – First datasheet version.

02/2022 – Wattage added, stylistic adjustments, change of logo.

03/2022 – Modified number of simultaneously connected clients using the SSCP protocol.

05/2022 – Memory size update.

08/2022 – Stylistic modifications.