

ICIO205.2 DDC controller



Summary

DDC (Direct digital control) controller ICIO205.2 is free programmable process station with ARM i.MX6UL processor and OS Linux. It contains two Ethernet ports, 8 AI, 8 DI, 6 AO, 8 DO, RS485 interface and 128 MB external SRAM. ICIO205.2 is suitable for control of larger installations (approximately 400...500 physical data points).

Application

- Free programmable control units for HVAC systems and other applications with web access
- Data acquisition, processing, and presentation systems with advanced networking features
- Protocol converters with web data presentation (must be programmed by user)

Function

The controller hosts an embedded Linux operating system which boots up the Domat runtime with the application. The board contains real time clock with battery backup, flash memory containing OS, runtime, application, and other data (time programs, setpoints etc.), and a watchdog. It is also possible to use NVRAM to backup parameters in case of unexpected system shutdown.

The application is created and uploaded in the Domat IDE development environment. The maximum application program size depends on number of physical and software data points, amount of function blocks which require more memory (e.g. time schedulers), degree of code optimisation, and number of connections the PLC has to handle.

For communication with other devices, ICIO205.2 contains 2 × Ethernet port and 1 × RS485 interface for I/O module extension. I/Os integrated on the board are 8 × AI, 8 × DI, 6 × AO and 8 × DO.

ICIO205.2 has sufficient computing power to control larger installation with external I/O modules and communication channels (for example Modbus TCP server, or SSCP client).

The process station contains a web server for remote connection and user intervention. The web pages are created in Domat IDE which is also used for uploading the exported web definition to the process station. From the security point of view, the website is not recommended for use in the public network, it is intended for operation in a local network. Therefore, it is necessary to integrate the configured router or other element that ensures network security during the design of the network topology.

The module is 217 mm wide and mounts on a standard DIN rail.

Technical data

Power	24 V AC/DC \pm 20 %; max 10 W
Communication	
Ethernet	2 \times Ethernet 10/100BaseT RJ45, 4 \times LED (link, data, ETH 1, ETH 2) integrated in the connector
RS485	COM1 RS485 (K+, K-) galvanically insulated, insulating voltage 1 kV 300...115 200 bit/s, parity and bits are set in SW maximal bus length 1200 m maximum number of modules depends on requested response time – up to 255 addresses, for common HVAC applications with ICIO205.2 use about 150 physical data points on the bus
19 \times LED	RUN, TxD, PWR, 8 \times DI state, 8 \times DO state
Analogue inputs	
Number	8
Resistance measuring range	0...1600 Ohm, 0...5000 Ohm, Pt100, Pt500, Pt1000, Ni1000-5000, Ni1000-6180 sensors (type of measuring is set using the Domat IDE, transformation is performed only at the application level in the PLC)
Voltage measuring range	0...10 V DC (type of measuring is set using the Domat IDE)
Current measuring range	0...20 mA AI1...AI4: particular DIP switch must be in position ON (type of measuring is set using the Domat IDE) AI5...AI8: with an external resistor of 125 Ohm (parallel connection; type of measuring is set using the Domat IDE)
Resolution	16 bit
Galvanic insulation	optically insulated up to 1 kV

Analogue outputs

Number	6
Voltage range	0...10 V DC
Analogue outputs load	min. 10 k Ω outputs are protected against permanent short-circuit – 10 mA limitation
Galvanic insulation	optically insulated up to 1 kV

Digital inputs

Number	8
Voltage	24 V AC/DC – voltage must be applied (no dry contacts), e.g. from G and G0
Input current	1.6 mA
Maximum voltage	60 V DC, 40 V AC
Max. switching frequency	10 Hz
Galvanic insulation	optically insulated up to 1 kV

Digital outputs

Number	6 \times NO (normally open) relays (no voltage - open) 2 \times changing relays
NO relay load (DO 1 to 6)	5 A at 250 V AC, 1250 VA 5 A at 30 V DC, 150 W
Changing relay load (DO 7 and 8)	8 A at 250 V AC, 2000 VA 8 A at 24 V DC, 192 W
Galvanic insulation	optically insulated up to 1 kV
Standard type	AC1, non-inductive load EN 60947-4-1
HW	ARM i.MX6UL 528 MHz, 64 MB FLASH, 128 MB RAM, 128 kB NVRAM FRAM
SW	Domat IDE 2.4.0.19 and newer
Housing	steel, powder coated surface
Dimensions	217 \times 115 \times 40 mm (including terminals); See the schema below.
Protection degree	IP20 (EN 60529 + A2:2019)
Terminals	screw terminals M3, maximum wire cross-section 2.5 mm ²
Ambient conditions	from -20...50 $^{\circ}$ C; 5...85% relative humidity; noncondensing gases, chemically non-aggressive conditions, fog, ice, and frost (according EN IEC 60721-3-3 ed. 2:2019 climatic class 3K22, 1K21, 3M11)

for installation at high altitude, it is necessary to consider the reduction of dielectric strength and a limited cooling air (EN IEC 60664-1 ed.3: 2020)


Standards of conformity

EMC EN IEC 61000-6-2 ed.4:2019, EN IEC 61000-6-4 ed.3:2019 (industrial environment)

Electrical safety EN IEC 62368-1 ed.2:2020 + A11:2020

Hazardous substances reduction EN IEC 63000:2019

Terminals

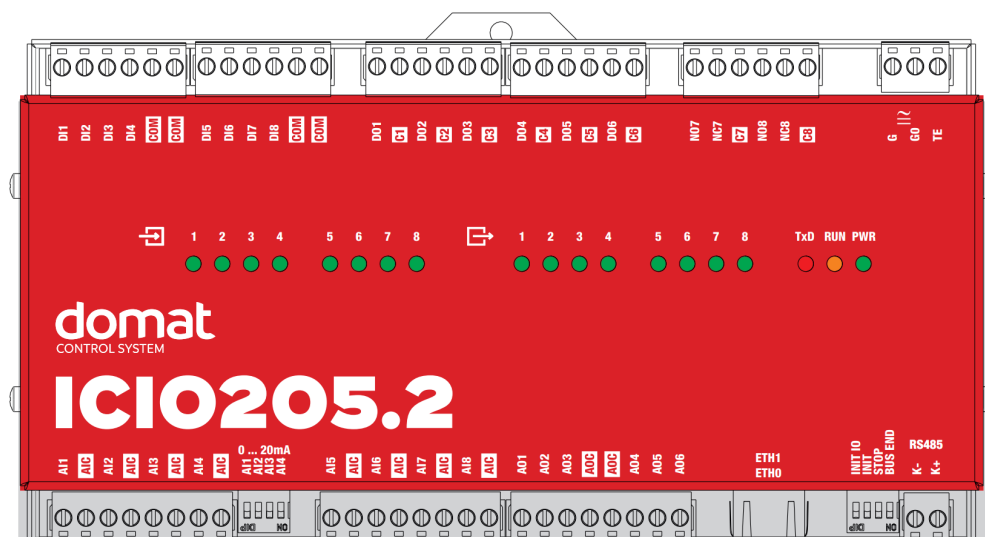

Terminals and connectors

DI1...8	digital inputs 1...8
COM	ground (common)
DO1...6	relay output 1...6, normally open against C1...C6
C1...6	relay output 1...6, ground
NO7	relay output 7, normally open against C7
NC7	relay output 7, normally closed against C7
C7	relay output 7, ground
NO8	relay output 8, normally open against C8
NC8	relay output 8, normally closed against C8
C8	relay output 8, ground
G	power
G0	power
TE	optional connection for shielding


AI1...8	analogue inputs 1...8
AIC	analogue input ground (common)

Notice:

All analogue inputs AI1 to AI8 have common ground AIC. The inputs are optically separated from the other parts of the I/O module. For three-wire connection (active sensors, e.g. pressure, humidity), the analogue input ground AIC must be connected with the peripheral 24 V AC power ground (or 0 V terminal for DC peripheral). As all I/O types are mutually separated in the module, it is possible to use one common transformer to power both the active peripherals and the ICIO module.


AO1...6	analogue outputs 1...6
AOC	analogue output ground (common) Notice: The ground is optically separated from the other parts of the I/O module. For three-wire connection (active periphery, e.g. valves actuators, frequency changer), the analogue output ground AOC must be connected with the peripheral 24 V AC power ground (or 0 V terminal for DC peripheral). As all I/O types are mutually separated in the module, it is possible to use one common transformer to power both the active peripherals and the ICIO module.
Ethernet	network interface
RS485	port COM1 – serial line RS485, terminals K+, K-
LED indication	
LED DI1...8	indication the statuses of the inputs (ON: voltage 24 AC/DC $\pm 10 \%$; OFF: no or low voltage)
LED DO1...8	indication the statuses of the outputs (ON: relay closed; OFF: relay open)
TxD	red LED – M-bus transmitting data at COM1 (flashing: receiving data; still ON: shortcircuited bus or bus overload)
RUN	yellow LED – system cycle (OK: LED flashes periodically 1 s ON, 1 s OFF; ERROR: LED flashes in other pattern, LED is permanently ON or OFF)
PWR	green LED – power (ON: power OK; OFF: no power applied, weak or damaged power supply, ...)
DIP switches	
STOP	if ON, the runtime is running, program execution is stopped
INIT	if ON at power-up, configuration parameters are brought to defaults (see Configuration parameters in Domat IDE; e.g. IP address, user and password, database settings, proxy, ...)
BUS END	2 Switches for bus RS485 termination (located at the RS485 connector); ON = bus end; the first and last devices on bus should have bus end ON
AI1...4	if ON, the parallel resistance 125 Ohm is connected and input is ready for current measuring

Connection

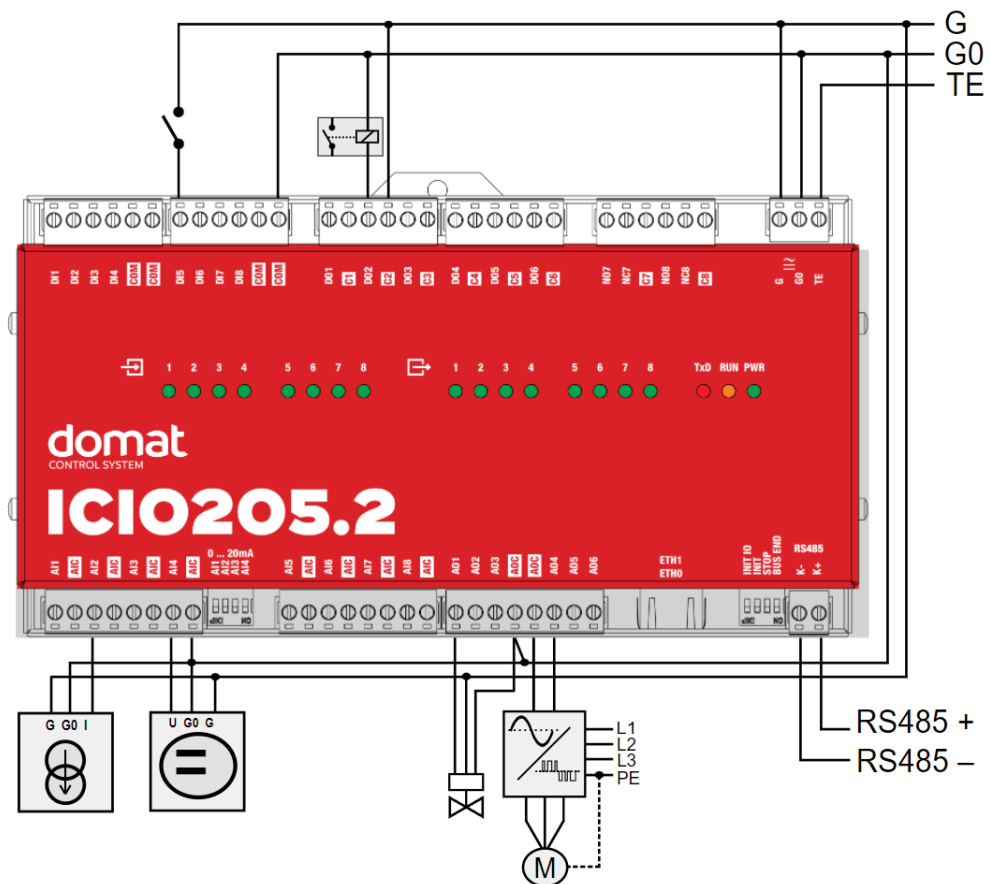

Resistive (passive) sensors are connected between A1x and A1C terminals, for the first 4 inputs must be DIP switch 0...20 mA in the off position. The resistance range is set in the software.

Dimensions

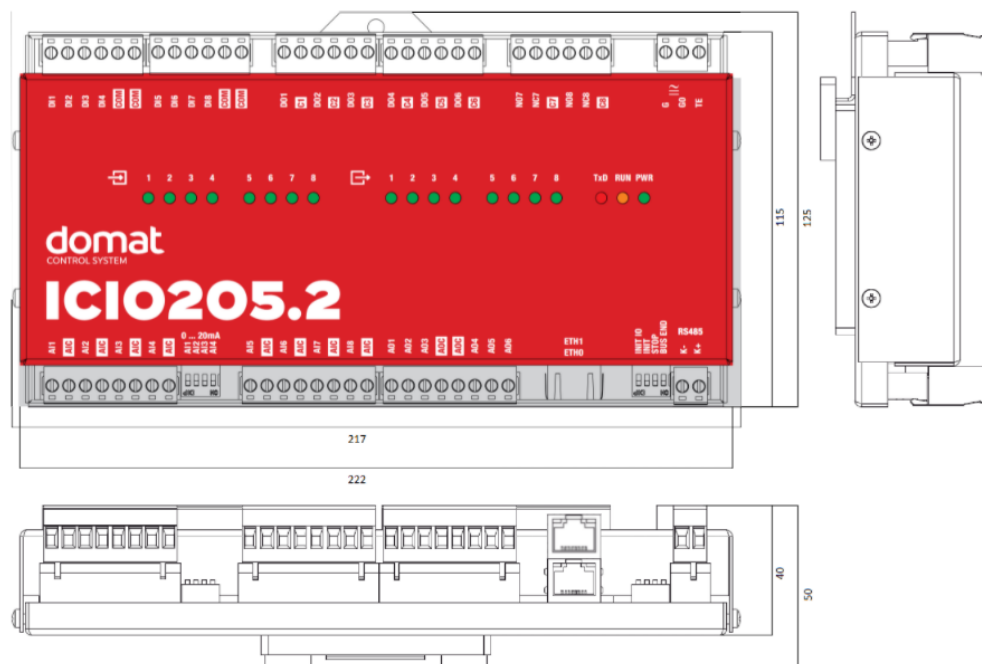

Dimensions are in mm.

Programming

Domat IDE

Programming tool Domat IDE contains I/O editor, graphical editor of the function plan (FBD), structure text editor, web page editor and LCD menu editor (HMI) for PLC and compiler.

The application program consists of function blocks which are stored in libraries. Those contain analogue and digital functions, mathematical blocks including goniometric functions, time schedulers, alarm blocks, and HVAC specific blocks (heat recovery, dewpoint calculation, enthalpy, pump switch etc.). In addition to function blocks, the application program can also be compiled from structured text, or a combination of both languages can be used.

The minimum guaranteed number of records for history on the PLC is 79 000, but the actual number of stored samples may be larger depending on the data types that are stored in the history.

Communication

Default network settings are:

IP address:	192.168.1.10
subnet mask:	255.255.255.0
default gateway:	192.168.1.1

SSCP user: admin

Password: rw

Notice: Do not forget to record the new network settings after change!

After these values have been changed, it is possible to bring the process station into default settings by the INIT DIP switch: set INIT to ON and restart the station. All values in the PLC configuration are set to defaults. The PLC will respond at the default IP address and it is possible to change the old address through Domat IDE.

The controllers can share variables over the Ethernet network (outside temperature, heat demands etc.) together with other PLC platforms.

The runtime provides drivers for communication with I/O modules and other subsystems which communicates e.g. through Modbus TCP/RTU (server/client), M-Bus, IEC62056-21, SSCP, SoftPLC link and BACnet IP server/client (see PICS). The complete list of drivers can be found in the Channel configuration dialogue in the most recent Domat release. Please check the required protocol features and functions with the list of implemented features in the Domat IDE help. It is also possible to program own communication drivers using the I/O library functions in structure text language.

Number of communication channels (on the serial lines and Ethernet) to I/O modules and subsystems is not directly restricted. It depends on available RAM PLC memory.

Number of connections from SSCP clients is max. 5. This includes connections from RcWare Vision, Domat IDE, HT102/200, mobile application Domat Visual, connection from other PLCs over SSCP etc.

Number of connections from Modbus TCP clients on Modbus TCP server is max. 5.

In case of implementation of your own ST driver, there is limitation of max. 10 clients connected simultaneously.

Other clients channels (web, ...) are not directly restricted.

WEEE notice

The device contains a non-rechargeable battery which backups the real-time clock and part of the memory. After the device is not operable, please return it to the manufacturer or dispose of it in compliance with local regulations.

Safety note

The device is designed for monitoring and control of heating, ventilation, and air conditioning systems. It must not be used for protection of persons against health risks or death, as a safety element, or in applications where its failure could lead to physical or property damage or environmental damage. All risks related to device operation must be considered together with design, installation, and operation of the entire control system which the device is part of.

Cyber security note

The product may influence the information and cyber security (ICS) of the control system. It is supplied in default settings. Implementation and continuous compliance with the ICS rules (e.g. creating and upload of certificates and keys, their updates and management, protection against misuse, etc.) are fully the responsibility of the control system operator. The manufacturer is not responsible for damages which originated or may originate due of wrong or insufficient implementation of ICS rules when using the device. In case of questions, please contact Domat Control System technical support.

**Changes in
versions**

07/2022 – First datasheet version.

09/2022 – Addition of information on AOC, AIC, flash memory size correction.

08/2023 – Change of names from Merbon to Domat